



## Strip Fixture

### Distinctive Qualities:

- 9-in-1 design (3 CCT's and 3 wattage's field selectable)
- Hinge-open design with tool-less access for easy wiring
- Microwave occupancy sensor available (MOQ applies)
- Emergency backup version available



### Technical Specifications:

**Warranty:** 5 Years (labor not included)

**PF:** >0.9    **THD:** <20%

**CRI:** >80

**Rated Voltage:** 120-277 VAC

**Dimming:** 0-10V (5%-100%)

**Lifetime:** L70: >60,000 hours


### Certifications:



Model No.	Size	Selectable Power	Efficacy	Lumens	Selectable CCT
STWU (WU Lens) or STWM (WM lens)	2'	20 (10/15/20)	130 lm/w	1,300 / 2,000 / 2,600	3,000K; 4,000K; 5,000K
		25 (15/20/25)		1,950 / 2,600 / 3,250	
	3'	30 (18/25/30)		2,340 / 3,250 / 3,900	
		4'		35 (20/28/35)	
	40 (28/35/40)			3,600 / 4,500 / 5,200	
	45 (25/35/45)			3,250 / 4,500 / 5,800	
	8'	65 (30/45/60)		3,900 / 5,800 / 7,800	
		75 (54/60/75)		7,000 / 7,800 / 9,750	
		90 (65/75/90)		8,500 / 9,750 / 11,700	




## Dimensions

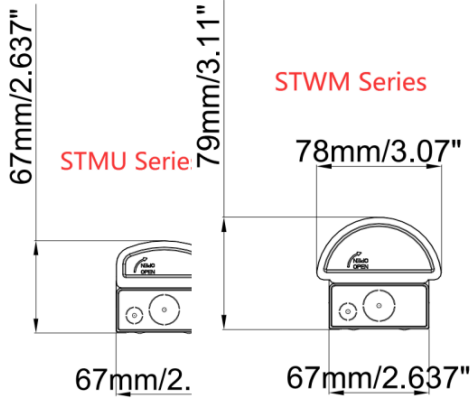


Size	LxWxH	
	WU Shape	WM Shape
2FT	2ftxW2.60"xH2.7" (607.8x66x69mm)	2ftxW3.07"xH3.19" (607.8x78x81mm)
3FT	3ftxW2.60"xH2.7" (906.8x66x69mm)	3ftxW3.07"xH3.19" (906.8x78x81mm)
4FT	4ftxW2.60"xH2.7" (1206.8x66x69mm)	4ftxW3.07"xH3.19" (1206.8x78x81mm)
8FT	8ftxW2.60"xH2.7" (2407.8x66x69mm)	8ftxW3.07"xH3.19" (2407.8x78x81mm)

## Photometry

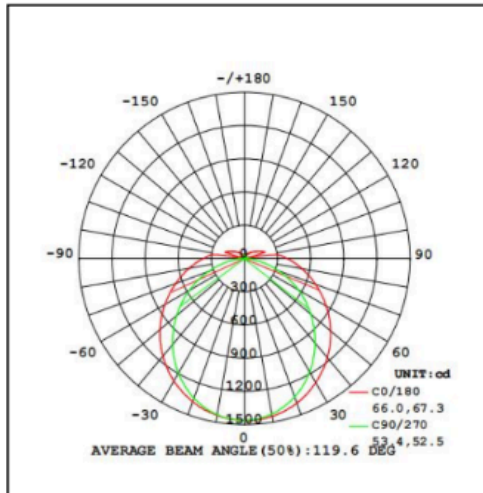

**WU Shape**

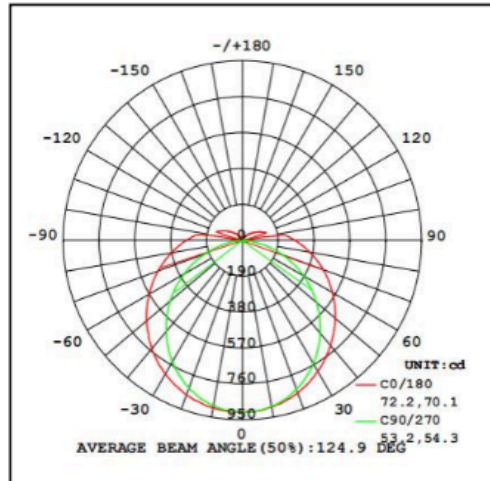

**WM Shape**

## Packing Quantities



Carton: 6pcs