



UFO High Bay

Distinctive Qualities:

- Replaceable driver with integrated heatsink
- Optional smart controls available: microwave sensor / PIR sensor
- Emergency backup version available



(With bracket mounting option shown)

Technical Specifications:

Warranty: 5 Years (labor not included)

PF: >0.9 **THD:** <20%

CRI: 80

Rated Voltage: 120-277 VAC (347V and 480V versions available)

Dimming: 0-10V (5%-100%)

Lifetime: L80: 50,000 hours

Durability: IP65 / IK08



(With loop and PC reflector option shown)







Certifications:



Model No.	Wattage	Efficacy	Lumens	CCT Selectable	MOQ
HB-UFO02-100W-01	50 / 80 / 100	160	8,000 / 12,800 / 16,000	3,500K / 4,000K / 5,000K	1,000 pcs
HB-UFO02-150W-01	100 / 125 / 150	160	16,000 / 20,000 / 24,000	3,500K / 4,000K / 5,000K	1,000 pcs
HB-UFO02-200W-01	150 / 175 / 200	160	24,000 / 28,000 / 32,000	3,500K / 4,000K / 5,000K	1,000 pcs
HB-UFO02-240W-01	160 / 200 / 240	160	25,600 / 32,000 / 38,400	3,500K / 4,000K / 5,000K	1,000 pcs



Dimensions

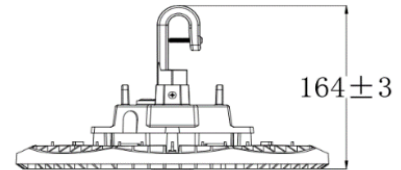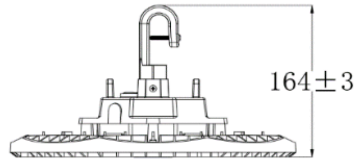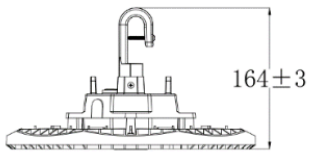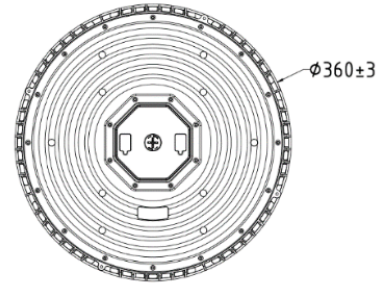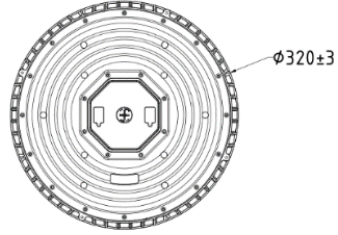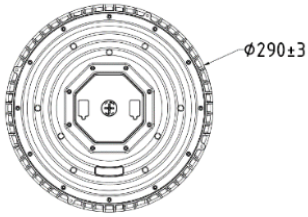

100W

150W

200W

Mounting Options



Bracket



Loop



Hook




Pendant Adapter

Accessories



PC Reflector

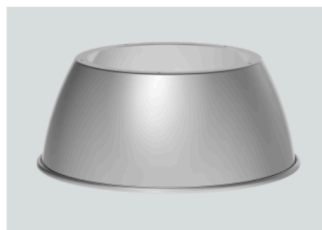

Aluminum Reflector



Waterproof Connector



Safety Cord