



## Vapor Tight

### Distinctive Qualities:

- 9-in-1 design (3 CCT's and 3 wattage's field selectable)
- Housing is 5VA flame rated and IK08 impact resistant
- Lens is UV-stabilized
- Microwave occupancy sensor available (MOQ applies)
- Emergency backup version available



### Technical Specifications:

**Warranty:** 5 Years (labor not included)

**PF:** >0.9    **THD:** <20%

**CRI:** >80

**Rated Voltage:** 120-277 VAC

**Dimming:** 0-10V (5%-100%)

**Lifetime:** L70: >50,000 hours

### Certifications:



Model No.	Size	Selectable Wattage	Efficacy	Lumens	CCT Selectable
VCWS	2ft	15 / 20 / 25	130 lm/w	1,950 / 2,600 / 3,250	3,500 / 4,000K / 5,000K
	4ft	20 / 30 / 40		2,600 / 3,900 / 5,200	
		36 / 42 / 48		4,680 / 5,460 / 6,240	
		30 / 40 / 50		3,900 / 5,200 / 6,500	




## Dimensions




Size (FT)	LxWxH
2	23.62"x4.96"x3.58"
4	47.24"x4.96"x3.58"

## Photometry

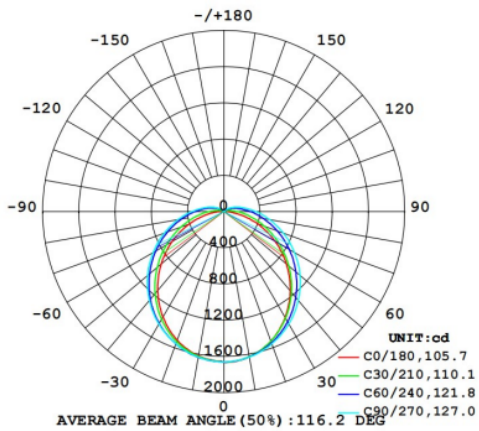

## Packing Quantities



Carton: 6pcs